


Slat Top Steel Chain

Series **uni 881** Type **Tab**

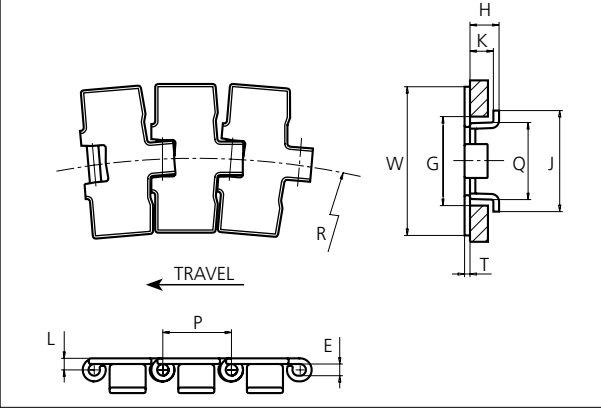

Slat Top Steel Chain
 Side flexing chain
 Pitch: 38.1 mm (1.50 in)
 Backflex radius:
 76.2 mm (3.00 in)

 Standard shipping lengths:
 coils of 80 links
 = 3.048 m (10.0 ft)

STANDARD

| E | | G | | H | | J | | K | | L | | P | | Q | | T | |
|-----|------|------|------|------|------|------|------|------|------|-----|------|------|------|------|------|-----|------|
| mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in |
| 6.4 | 0.25 | 44.5 | 1.75 | 16.3 | 0.64 | 56.2 | 2.21 | 12.7 | 0.50 | 6.5 | 0.26 | 38.1 | 1.50 | 43.0 | 1.69 | 3.0 | 0.12 |

SIDE FLEXING

| | Width (W) | | Min. radius (R) | | Weight | | Permissible tensile strength N/lbf | Chain material | Pin material* | Surface | |
|-------------|-----------|------|-----------------|-------|--------|-------|------------------------------------|--------------------------------------|---------------------------------------|-----------|----------|
| | mm | in | mm | in | kg/m | lb/ft | | | | Roughness | Hardness |
| K325 | 82.6 | 3.25 | 457 | 17.99 | 2.90 | 1.95 | 4000 / 899 | S1045 (Heat-treated Carbon Steel) | S1045 (Case-hardened Carbon Steel) | < 0.5 µm | 43 HRC |
| K450 | 114.3 | 4.50 | 500 | 19.69 | 3.60 | 2.42 | | | | | |
| K750 | 190.5 | 7.50 | 500 | 19.69 | 5.30 | 3.56 | | | | | |

* Chains with special hardened pin (HP) for additional wear resistance and higher corrosion strength are made to order.

PITCH 38.1 MM/1.50 IN

