

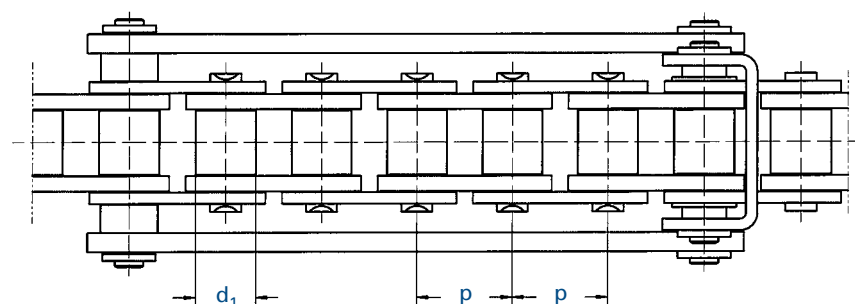


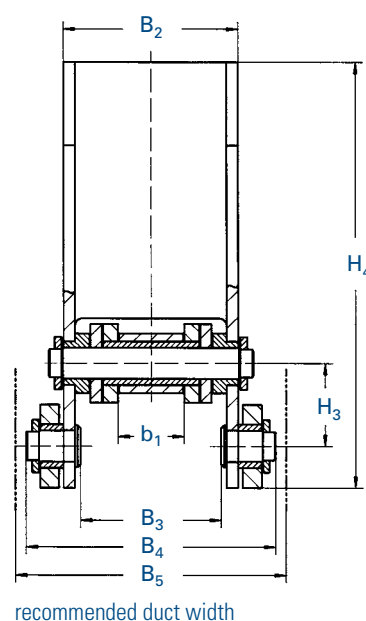

## Pusher dog

Secure transport of general cargo

During conveyance the WIPPERMANN pusher is at right angles to the chain. In the deflection phase it submerges under the transported material without damaging it.

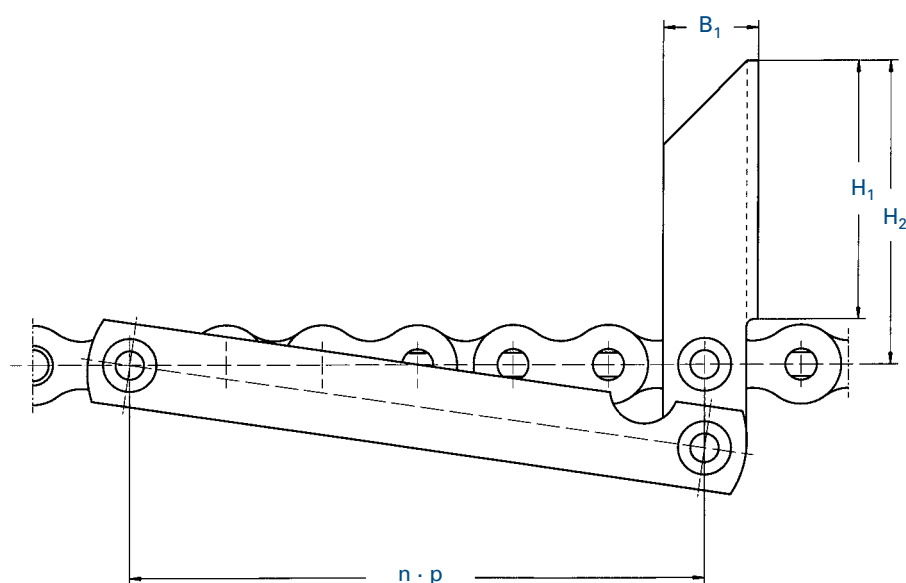

Chain		Sprockets		Pitch $p$	Inner width $b_1$ min.	Roller $\varnothing$ $d_1$ max.	Pusher dog dimensions										Thrust  max.  kN
		Number of teeth	Hub $\varnothing$ max.				$B_1$	$B_2$	$B_3$	$B_4$	$B_5$	$H_1$	$H_2$	$H_3$	$H_4$	$n$	
No.	Ind.			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
462 / M 120	<sup>10</sup>	20	32	12,700	7,75	8,51	18,0	25,0	19,0	35,0	40,0	22,0	29,0	11,0	46,0	5	0,5
501 / M 132	<sup>10</sup>	32	80	15,875	9,65	10,16	18,0	31,0	23,0	40,0	45,0	50,0	60,0	18,0	86,0	8	1,0
501 / M 133	<sup>10</sup>	24	60	15,875	9,65	10,16	18,0	31,0	23,0	40,0	45,0	50,0	60,0	14,0	82,0	6	1,0
548 / M 132	<sup>10</sup>	24	90	25,400	17,02	15,88	25,0	46,0	37,0	65,0	70,0	68,0	80,0	22,0	113,0	6	3,0

<sup>10</sup> can also be supplied in stainless steel

All designs can also be supplied as MARATHON roller chains (maintenance-free), BIATHLON, BIATHLON KS, TRIATHLON and TRIATHLON KS! For details on orders and enquiries see page 132. For untoleranced dimensions DIN ISO 2768 c applies.